

Assembly instruction:

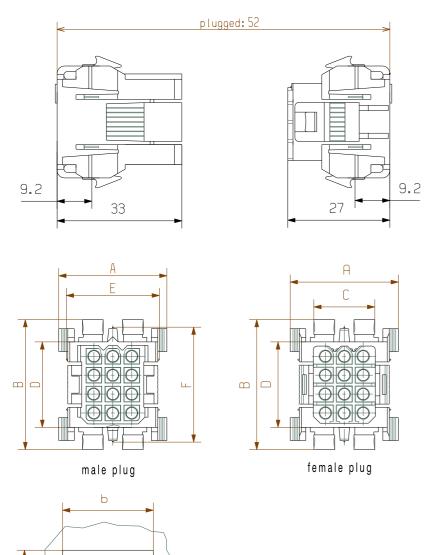



mounting cut-out wall thickness: 1,3 - 2,3mm

33,0

33,0

46,0

61,0

24

36

recommended: 1,5 - 2,0mm

dimension male plug / female plug mounting cut-out D a +0.3 -0.0 b +0.3 -0.0 poles 23,0 25,0 12,8 17,8 20,3 10,8 18,1 23,0 30,0 10,8 17,6 17,8 25,1 18,1 29,0 17,6 23,8 25,1 9 30,0 16.6 24.0 29,0 22,6 12 35,0 16,6 23,8 30,0 24,0 29,0 16,6 33,0 23,8 40,5 24,0 18 46,0

33,0

48,0

27,8

27,8

40,5


55,5


28,3


28,3

20,6

20,6

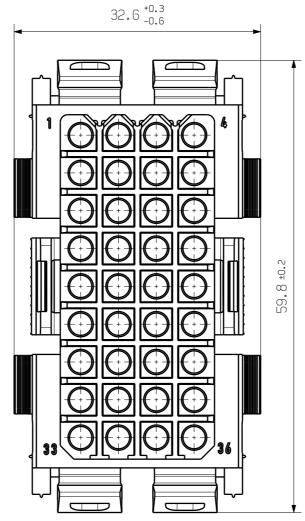

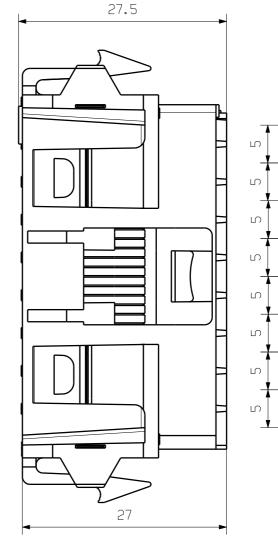


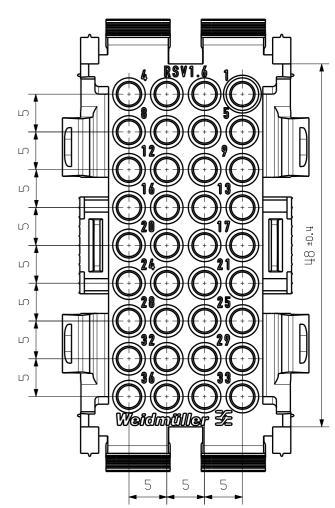

SOCKET HOUSING

Product file: RSV 1.6 CRIMP

7265



Weidmueller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the connectors are used to the intended purpose, all requirements with respect to the

Checked

Approved

12.07.2018 HERTEL S

LANG T

Scale: 10:1

Supersedes:

