

9. Communication connections

The Ethernet switch is equipped with following communication interfaces:

- 8 x 10/100/1000BASE-T(X) ports
- 12 x 100/1000BASE-X ports (SFP slots)



Please only use cables suitable for the respective type of communication and ensure that signals are protected from possible interference.


9.1 10/100/1000BASE-T(X) RJ45 ports

The 10/100/1000BaseT(X) ports located on the front panel are used to connect to Ethernet-enabled devices. The following table shows pinouts for both MDI ports (NIC-type) and MDI-X ports (HUB/Switchtype). Auto MDI-X ensures that both wiring schemes are supported (automatic crossover function).

10/100BASE-T(X) MDI/MDI-X			1000BASE-T(X) MDI/MDI-X			8-pin RJ45
Pin	MDI port	MDI-X port	Pin	MDI port	MDI-X port	
1	TD+ (transmit)	RD+ (receive)	1	BI_DA+	BI_DB+	
2	TD- (transmit)	RD- (receive)	2	BI_DA-	BI_DB-	
3	RD+ (receive)	TD+ (transmit)	3	BI_DB+	BI_DA+	
4	not used	not used	4	BI_DC+	BI_DD+	
5	not used	not used	5	BI_DC-	BI_DD-	
6	RD- (receive)	TD- (transmit)	6	BI_DB-	BI_DA-	
7	not used	not used	7	BI_DD+	BI_DC+	
8	not used	not used	8	BI_DD-	BI_DC-	

9.2 100/1000BASE-X SFP fiber optic port

The 100/1000BaseSFP type slots require either a 100BaseSFP or a 1000BaseSFP fiber transceiver (mini-GBIC) to work properly. Please only use SFP modules and cables that are compatible with each other to establish an optical connection.

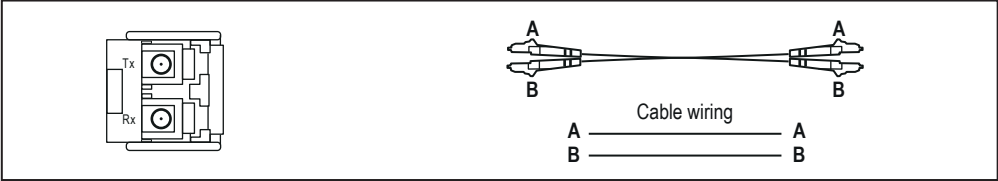

For a LC-Port with separate transmit and receive ports please remember to connect the Tx (transmit) port of device 1 to the Rx (receive) port of device 2, and the Rx (receive) port of device 1 to the Tx (transmit) port of device 2.

9.3 RS232 console port

The RS232 interface with RJ45 connector can be used to access the switch console for configuration.

Pin	Pin assignment	Communication parameters	8-pin RJ45
1	not assigned	Baud rate: 115200 bps	
2	RxD	Data bit: 8	
3	TxD	Parity: No	
5	GND	Stop bit: 1	
4, 6 ... 8	not assigned	Flow control: No	

10. Commissioning the device

Before commissioning the device for the first time, we strongly recommend checking the installed firmware version and updating to the latest version, if a newer one is available. Please check and download the newest version from the Weidmüller website.

After updating the device to the latest firmware at first commissioning, we strongly recommend performing a reset to factory defaults additionally after the new firmware is running.

11. User management

11.1 Device access (login to web interface)

The web interface of the switch can be accessed via following factory default settings:

IP address / Netmask: 192.168.1.110 / 255.255.255.0
User name: admin
Password: Detmold

- Connect the PC to any Ethernet port of the managed switch and set the PC's IP address to a free one of range 192.168.1.0 / 255.255.255.0.
- Start a web browser and enter the IP address of the connected switch into the browser's address line (http://192.168.1.110).
- After the appearance of prompt (login) enter the login credentials.
- Confirm your input with **OK**.

The home page of the switch will be displayed.



For detailed information about configuration and use of the device features please regard the manual. The manual is available to download from the Weidmüller website: Product catalogue/Automation & Software/Industrial Ethernet/Advanced Line managed Switches/Select Product/Click and expand section „Downloads“/Download needed software or documentation.

11.2 Rebooting or resetting the switch

The behaviour of the reset button can be configured in the web interface (menu **Factory Default**). The default setting acts as described here.

- To reboot the switch (warm start) and set the IP to factory default IP, press the reset button for less than 5 seconds.
- To reset the switch configuration to factory default settings, press the reset button for more than 5 seconds.

12. LED indicators

The following table describes the functions of the LED indicators at the front panel.

LED	Color	Status	Description
PWR1	Green	On	Power supplied to power input PWR1.
PWR2	Green	On	Power supplied to power input PWR2.
R-MSTR (ring master)	Green	On	Is ring master of an enabled O-Ring.
RING	Green	On	O-Ring redundancy is enabled.
		Blinking	Ring structure is broken (no redundancy).
FAULT	Amber	On	Fault relay indication for power failure and port link loss.
LNK/ACT RJ45 ports G1 – G8	Green	On	Port link is active.
		Off	Port link is inactive.
		Blinking	Data is transmitted.
10/100/1000M RJ45 ports G1 – G8	Green/Amber	Green	Port speed is set to 1000 Mbps
		Amber	Port speed is set to 100 Mbps
		Blinking	Port speed is set to 10 Mbps
LNK/ACT SFP ports G9 – G20	Green	On	Port link is active.
		Blinking	Data is transmitted.

13. Disposal



Observe the notes for proper disposal of the product. You can find the notes here: www.weidmueller.com/disposal.



14. Specifications

Technology	
Ethernet standards	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-TX and 100BASE-FX IEEE 802.3ab for 1000BASE-T IEEE 802.3z for 1000BASE-X IEEE 802.3x for flow control IEEE 802.3ad for port trunk with LACP IEEE 802.1D for STP (Spanning Tree protocol) IEEE 802.1w for RSTP (Rapid Spanning Tree protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)
Processing type	Store-and-forward
MAC address table size	8K
Backplane bandwidth	40 Gbps
Interfaces	
RJ45 ports	8 x 10/100/1000BASE-T(X) auto negotiation speed, F/H duplex mode and auto MDI/MDI-X connection
Fibre optic ports	12 x 100/1000BASE-X SFP slots
RS232 console port	RS232 Interface with RJ45 connector for console access
LED indicators	PWR1, PWR2 (Power), Fault (Relay), Ring Master, Ring Status, Port Link/Activity/Speed
Relay contact	Max. 1A at 24 V DC for Power Failure and Port Link Loss
Power supply	
Input voltage	24 V DC (12 ... 48 V DC), 2 redundant inputs
Power consumption (max.)	23 W
Connection	Removable 6-pin terminal block, Wiring cable 12 ... 24AWG
Overload current protection	Yes
Reverse polarity protection	Yes
Physical characteristics	
Housing	IP30 protection, metal
Dimensions (W x H x D)	96.4 x 154 x 145.5 mm (3.8 x 6.06 x 5.73 inch)
Weight	1520 g
Installation	DIN-rail
Environmental conditions	
Operating temperature	-40 ... 75 °C (-40 ... 167 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Ambient relative humidity	5 ... 95 % (non-condensing)
Operating altitude	Up to 2000 m
Regulatory approvals	
Safety	EN 62368-1
EMC	EN 55032, EN 55024, FCC Part 15 Subpart B Class A, IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 Ghz: 3 V/m, IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 0.5 kV; Signal: 1 kV, IEC 61000-4-6 CS: 3 Vrms
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-31
Vibration	IEC 60068-2-6
MTBF	
Time	490,861 hrs
Database	Telcordia SR332
Warranty	
Time period	5 years

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
www.weidmueller.com

3151950000/00/04.2025